

# BIM-based framework for indoor acoustic conditioning in early stages of design<sup>1</sup>



Aguilar-Aguilera, A. J.<sup>1</sup>; De la Hoz-Torres, M. L.<sup>1</sup>; Martínez-Aires, M. D.<sup>2</sup>; Ruiz, Diego P.<sup>1</sup>

<sup>1</sup> Dept. of Applied Physics, University of Granada

<sup>2</sup> Dept. of Building Construction, University of Granada, España

antojes@ugr.es

PACS: 43.35.Ka

## Premio Andrés Lara para jóvenes investigadores 2019

### Resumen

La evaluación del rendimiento acústico en espacios interiores es un factor crítico para la comodidad del usuario. Los proyectos de construcción deben tener en cuenta las consideraciones acústicas interiores en las primeras etapas del diseño, ya que a menudo es más costoso y difícil alcanzar los estándares acústicos en las etapas posteriores. En este contexto, la metodología Building Information Modelling (BIM) ofrece una oportunidad a los diseñadores que deseen analizar las condiciones acústicas desde la fase inicial de los proyectos. BIM, como metodología, implica un proceso para generar y gestionar datos sobre las propiedades y características del proyecto durante el ciclo de vida del edificio. El objetivo de este estudio es proponer un marco de trabajo que utilice la metodología BIM para la toma de decisiones en las primeras etapas del diseño. Para ello, se ha desarrollado una herramienta BIM que permite estimar el aislamiento acústico a ruido aéreo entre los espacios interiores y el tiempo de reverberación.

### Abstract

Indoor acoustic performance is a critical factor for user comfort and it is linked to a healthy indoor environment. Building projects should take into account indoor acoustic considerations in the early stages of design since it is often more expensive and difficult to achieve acoustic standards in subsequent stages. In this context, the Building Information Modelling (BIM) methodology offers an improvement opportunity to designers who want to consider acoustic conditions from the initial phase of the building projects. BIM, as a methodology, involves a process to generate and manage data on the properties and characteristics of the construction project during the building life cycle. The aim of this study is to propose a framework using BIM methodology for decision making at early stages of design. For this purpose, a software tool implemented in BIM has been developed that allows us to estimate and take into account the main acoustic parameters (absorption, insulation) during the design of the project.

**Keywords:** Noise, Indoor Environment, BIM.

## 1. Introduction

Nowadays, people spent the most part of a day in indoor environment (about 80-90%) [1]. Therefore, indoor conditions of buildings become an important factor in the occupant/user lives. Within these indoor conditions, the environment quality of spaces in buildings are highly conditioned by the indoor acoustic behavior [2, 3]. In this regard, the acoustic performance is conditioned not only by outside noise sources but also those inner building

sources and other adjacent spaces [4, 5]. So, these inner sources should also be controlled in order to guarantee the comfort of the user.

Despite of the fact that the acoustic behavior of the building has a high impact on its occupants, it is not often taken into account from the early stages of the project (except in buildings where acoustic requirements are particularly important, such as theatre or auditorium). In general, the analysis of the acoustic performance of spaces

<sup>1</sup> Artículo publicado en inglés por haber sido presentado y premiado en INTER-NOISE 2019.

is evaluated in an advance stage of the construction projects, where generally the geometry and configurations of the spaces are fixed. Thus, achieving the minimum acoustic requirements at this stage of the project is more complicated and costly than if it had been managed at an early stage [6, 7].

Moreover, acoustic simulations are often carried out with a specific software (Odeon, Catt-Acoustic, Ease, Soundplane, etc.) different from or not integrated within the software used to design the building. In conventional building projects, this process involves additional work and is time-consuming [6]. In this sense, Building Information Modelling (BIM) is a new methodology that has been developed in recent years, replacing the traditional methodology based on Computer-Aided Design (CAD) and improving the project management [8] and it aims to overcome those problems.

BIM, as a methodology, involves a process to generate and manage data related to properties and characteristics of the construction project during the building life cycle. These data do not only refer to geometric or visual properties, but also includes information about material properties, geographic information, etc. The BIM model becomes a digital representation of all physical and functional characteristics of a building, a database of reliable information which can be consulted throughout the service life of a construction, from design to demolition [9]. The use of a single model concentrating all the project information and data offers a global vision and better coordination of the process. Consequently, BIM methodology has a great potential and its implementation is accelerating a fast technological transformation in Architecture, Engineering and Construction industry (AEC).

In addition, the possibility of implementing BIM in construction projects provides an exceptional opportunity to


evaluate acoustic performance from an initial phase. BIM helps to visualize different scenarios during the design and construction process. Therefore, BIM has the potential to improve the design process and to supports architects, engineers and builders making decision in the acoustic field [6, 10].

In this study, a software tool was developed in order to propose a framework using BIM methodology for decision making at the early stages of the design. This software is a first approach to an estimation framework model of airborne sound insulation between horizontal indoor spaces and the reverberation time (in accordance to the Spanish requirements CTE DB-HR [11] and ISO 12354-1:2017 standard [12]). This framework enables designers to explore design alternatives in order to achieve a high level of acoustic performance in early stage of design.

## 2. BIM Framework proposed method: Methodology

### 2.1. BIM-based framework indoor acoustic performance

A framework integrated in BIM is developed as a tool to enable an indoor acoustic optimization in the design process of buildings. This tool allows different agents to collaborate across the process of performance-based design. The information stored in the parametric BIM model is used to simulate the acoustic behavior of the interior space. The framework was developed on Autodesk Revit [13] (a software BIM tool) and visual programming software (Dynamo version 2.0.2) [14]. Fig. 1 shows an example of the operating mode of the proposed performance simulation tools using Dynamo software.

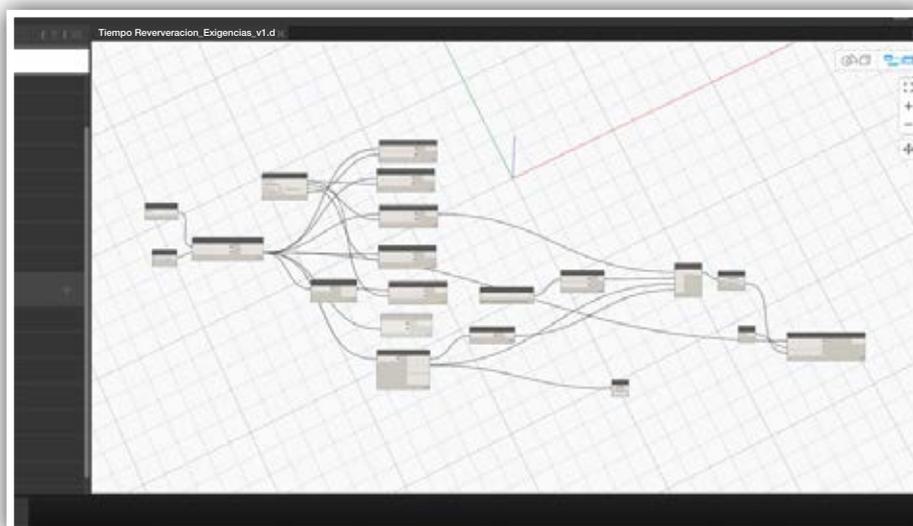

**Figure 1.** Example of visual programming software of the proposed performance simulation tool.

Dynamo nodes and Python scripting were used in this study to create a simulation package for calculation of the reverberation time and the airborne sound insulation between rooms. As a part of the tool workflow, the Reverberation Time Simulation (RTS) package is developed to parametrically interact with Autodesk Revit in order to calculate the Reverberation Time value of each indoor spaced. Furthermore, the Airborne Sound Insulation Simulation (ASIS) package for parametric acoustic simulation between adjacent spaces were implemented.

Both, RTS and ASIS packages, implement an automatic workflow that enables to simulate the acoustic performance accordingly to the parametric changes made into the BIM model. Designers can explore possible alternatives for optimizing acoustic performance based on the executions of the acoustic simulation.

The geometry data, project information and acoustic properties of the construction materials stored in the model were used in the initial nodes of the workflow to create the acoustic simulation model. As a first approach, the created acoustic simulation package is only applicable to spaces contained on the same floor for the sake of simplicity. The building floor level is require as a user input by the developed package. The other variables (geometric and non-geometric) are extracted from the BIM model. Fig. 2 shows the diagram of the acoustic simulation process.

### 2.2. Indoor acoustic analysis

- The acoustic performance includes the estimation of both, reverberation time and the airborne sound

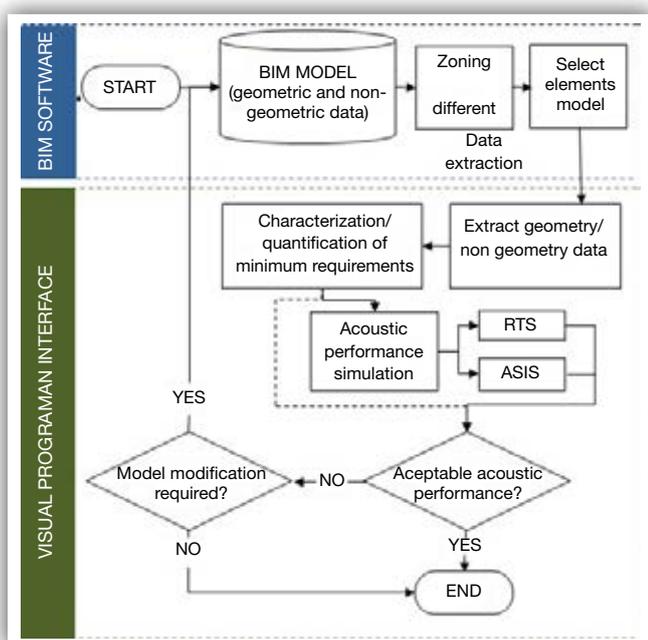


Figure 2. Diagram of the acoustic simulation process and developed software.

insulation. On the one hand, the reverberation time,  $T$ , of the room is calculated using Equation 1:

$$T = \frac{0.161 \cdot V}{A} \quad (1)$$

where  $V$  is the room volume ( $m^3$ ),  $A$  is the total sound absorption of the room.

Total sound absorption is calculated as in Equation 2:

$$A = \sum_{i=1}^n \alpha_{m,i} S_i + \sum_{j=1}^N A_{O,m,j} + 4\overline{m_m} V \quad (2)$$

where:

$\alpha_{m,i}$  average acoustic absorption coefficient of each facing, for the third octave bands centered on the frequencies of 500, 1000 and 2000 Hz.

$S_i$  facing area with coefficient of absorption  $\alpha_{m,i}$  ( $m^2$ ).

$A_{O,m,j}$  equivalent average acoustic absorption area of each different absorbent fixed furniture ( $m^2$ ).

$V$  volume of the room ( $m^3$ ).

$\overline{m_m}$  average sound absorption coefficient in air, for frequencies of 500, 1000 and 2000 Hz.

On the other hand, the simplified model described in the EN 12354-1 standard has been implemented in order to calculate the the airborne sound insulation between adjacent rooms (Equation 3).

$$D_{nT,A} = R'_{A} + 10 \log \left( \frac{0.32V}{S_s} \right) \quad (3)$$

Where:

$D_{nT,A}$  Standardized A-weighted sound pressure level difference within rooms,

$V$  Receiver room volume,

$S_s$  area of the separation element,

$R'_{A}$  A-weighted apparent acoustic reduction global index. The  $R'_{A}$  was calculated as in Equation 4:

$$R'_{A} = 10 \log \left( 10^{-0.1R_{Dd,A}} + \sum_{F=f=1}^n 10^{-0.1R_{Ff,A}} + \sum_{F=f=1}^n 10^{-0.1R_{Df,A}} + \sum_{F=f=1}^n 10^{-0.1R_{Fd,A}} + \frac{A_0}{S_s} \sum_{\beta=\theta,S_i}^n 10^{-0.1D_{n\beta,A}} \right) \quad (4)$$

Where:

$R_{Dd,A}$  A-weighted sound reduction index for direct transmission

$R_{Ff,A}$  A-weighted flanking sound reduction index for transmission path Ff

$R_{Df,A}$  A-weighted flanking sound reduction index for transmission path Df

$R_{Fd,A}$  A-weighted flanking sound reduction index for transmission path Fd

$n$  stands for the number of flanking elements

The sound flanking reduction index for each path was calculated using the following Equation 5:

$$R_{Df,A} = \frac{R_{i,A} + R_{j,A}}{2} + \Delta R_{i,j,A} + K_{ij} + 10 \log \frac{S_s}{I_0 I_f} \quad (5)$$

Where:

$R_{i,A}$  and  $R_{j,A}$  are the A-weighted sound reduction index for the dividing or separating element and flanking elements, respectively.

$S_s$  is the separating element surface area.

$I_{i,j}$  is the junction length between the separating element and flanking element.

$K_{ij}$  is the vibration reduction index for the T junction.

$\Delta R_{i,j,A}$  sound reduction index improvement by additional layers added to the separating element in the source room and/or receiving room.

### 2.3. Overview of the propose BIM-workflow

The process of assessment the acoustic performance and obtaining feedback for taking a design decision was established in six consecutive phases. The process pro-

posed in this section is shown in Fig. 3. In the first phase the BIM model is created. The design of the building and the construction elements are developed, as well as the setting up of the project information, materials and construction systems. The designer can create, modify or import from an external data base the acoustic properties of the building materials. This information would be then add into a list.

In the second phase the zoning of the building is carried out. The typology of the areas is established according to their use. The designer defines the characteristics of each space (use, type of space, etc.). These variables are defined in a Revit interface and it is used to establish the relationships between adjacent spaces. All these data are used in the acoustic simulation.

In the third phase, the geometric (enclosure dimensions, volume, etc.) and non-geometric data (absorption coefficients, etc.) are extracted from the BIM model through the visual application of programming. In the fourth phase, the model calculates the characterization and quantification of the acoustic requirements according to the regulations using the prescribed construction elements. In the fifth phase, the simulation of the two programmed packages is carried out:

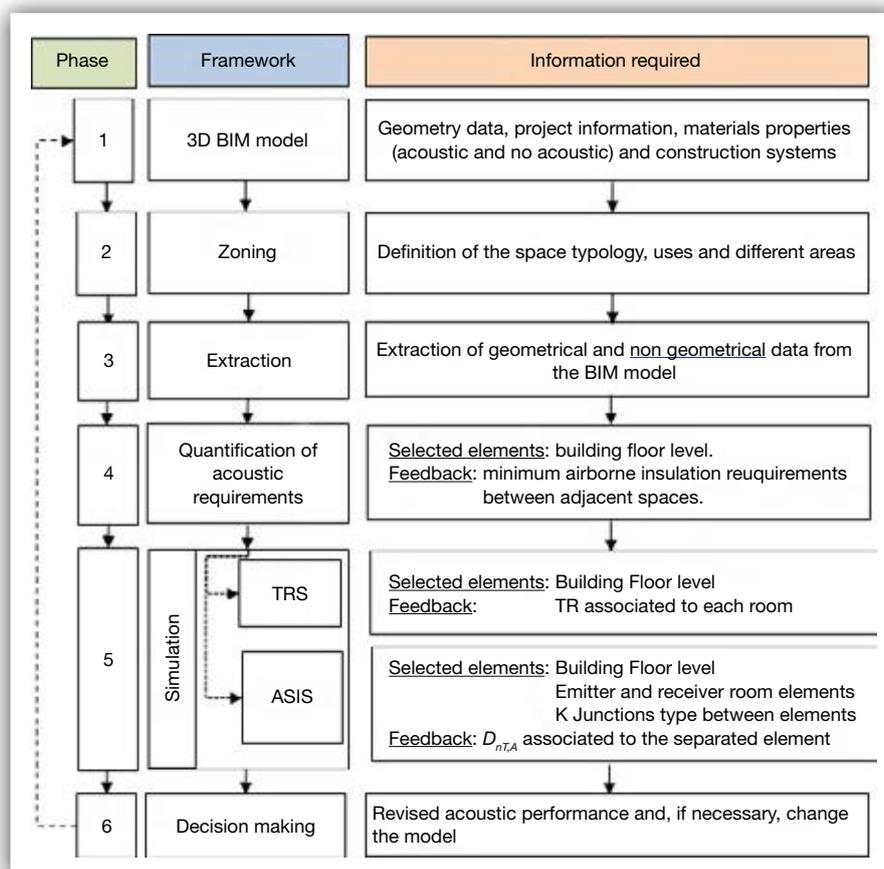


Figure 3. Diagram of the proposed workflow process.

- 1) the RTS package: this package performs the automatic calculation of reverberation time, depending on the spaces previously defined by the designer. Absorption coefficients are introduced manually or selected from a database.
- 2) the ASIS package: This package calculates the airborne acoustic insulation between two adjoining areas on the same level of the building model. Through the visual programming interface the elements of the model necessary for the calculation are selected.

In the last phase, a visualization of the obtained results is shown in the BIM model. The feedback allows the designers to evaluate the results and to make decisions. At this phase, the designers can proceed in two ways: (1) if the acoustic performance is acceptable, so the process will end; (2) if the acoustic performance is not acceptable, the designer can modified the model in the Revit interface (improving the geometry of the space or acoustic material properties) and then re-evaluate the acoustic performance using this proposed tool.

### 3. Case study for the proposed method

A case of study was implemented to test the proposed framework. The BIM model of a building was designed to check out both, the RTS and the ASIS packages. Fig. 4 shows a floor plan of the building that carried

out the analysis. In the first phase, the geometry of the building was modelled and the construction systems were selected according to the construction specifications of the project. In the second phase, the floor areas were defined by their uses (installation facilities, protected room, habitable room, etc.).

In the next phase the geometric and non-geometric data were extracted from the BIM model. The data are used as an input to determine the characterization and quantification of the minimum requirements established for each elements. Fig. 5 shows the data obtained at the end of this phase.

In the next step the reverberation time was calculated. This process is automatic, the program identifies the areas defined by the user and performs the analysis. The Fig. 6 shows the schedule of the results obtained after the analysis.

Hereafter, the airborne noise isolation between areas was calculated. Through the interface of the program, the necessary elements for the calculation were selected. Fig. 7 shows an example of an element selection in the BIM model.

Finally, to test the obtained data from our proposed method, a simulation was carried out with the official software provided by the Spanish government (DB-HR software for Technical Code for Building Construction) to verify the results obtained. A variety of construction solutions and materials were tested in this process and the

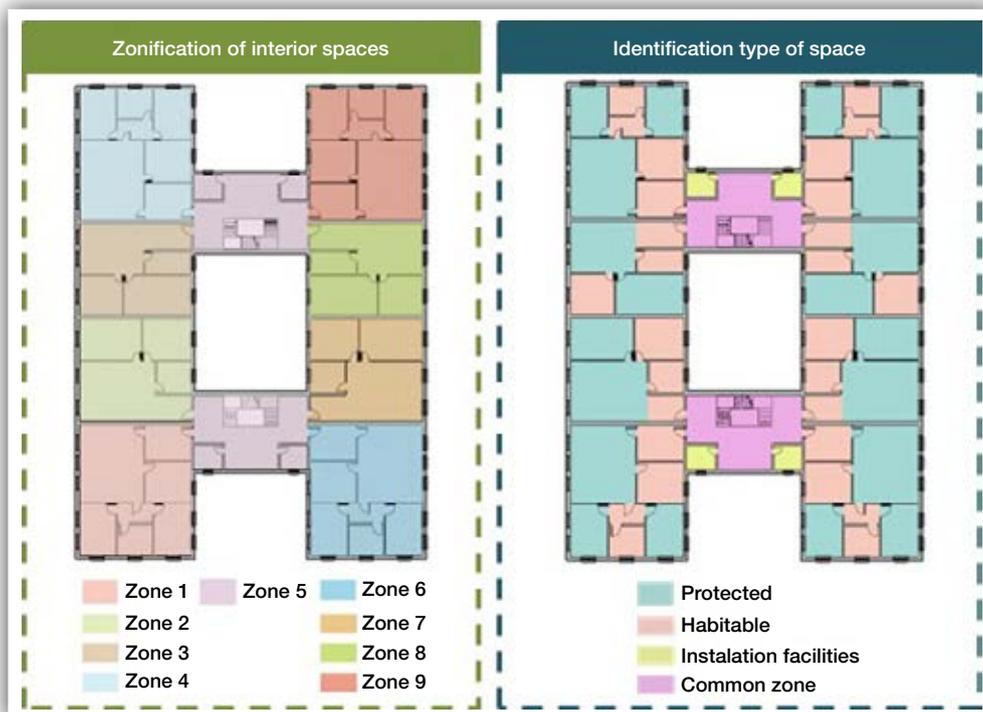


Figure 4. a. Zonification. b. Visualization of different type of space level building model.

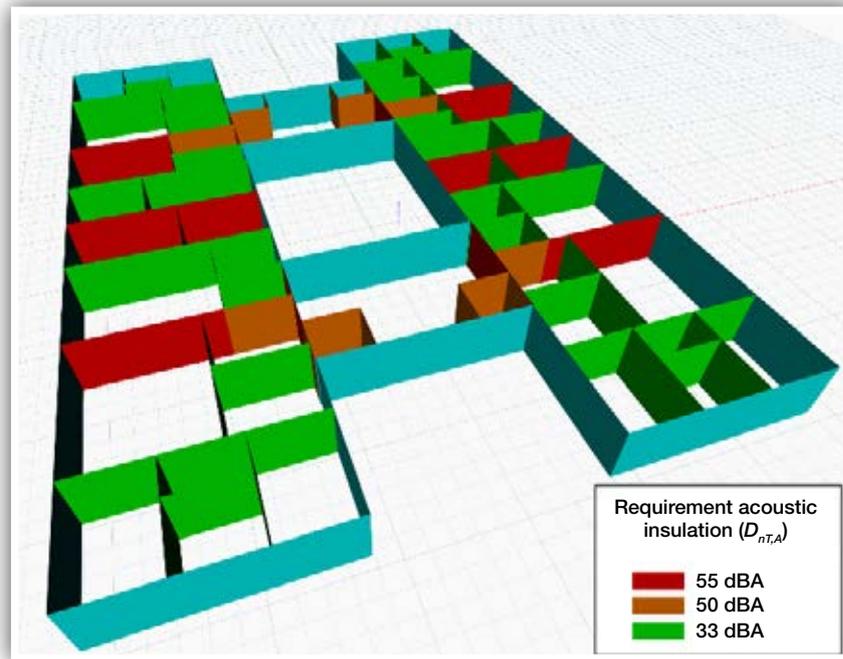


Figure 5. Visualization of the requirements of acoustic insulation to airborne noise between rooms.

<Schedule RT simulation>				
A	B	C	D	E
Level	Name	Area	Volume	RT
Nivel 1	Hall	12.26 m <sup>2</sup>	33.10 m <sup>3</sup>	0.70716
Nivel 1	Living room	38.08 m <sup>2</sup>	102.82 m <sup>3</sup>	1.057371
Nivel 1	Bedroom	14.42 m <sup>2</sup>	38.92 m <sup>3</sup>	0.74776
Nivel 1	Bath	8.25 m <sup>2</sup>	22.27 m <sup>3</sup>	0.608503
Nivel 1	Bedroom	14.21 m <sup>2</sup>	38.38 m <sup>3</sup>	0.743116
Nivel 1	Corridor	5.07 m <sup>2</sup>	13.69 m <sup>3</sup>	0.481127
Nivel 1	Kitchen	14.06 m <sup>2</sup>	37.96 m <sup>3</sup>	0.748114
Nivel 1	Kitchen	15.12 m <sup>2</sup>	40.82 m <sup>3</sup>	0.767786
Nivel 1	Bedroom	19.28 m <sup>2</sup>	52.05 m <sup>3</sup>	0.829078
Nivel 1	Living room	34.68 m <sup>2</sup>	93.64 m <sup>3</sup>	1.032801
Nivel 1	Bath	8.16 m <sup>2</sup>	22.02 m <sup>3</sup>	0.613033

Figure 6. Time reverberation results from RTS package.

comparison shows that the obtained results from our scheme are similar to that provided by the official software with a difference range less than 1 %.

#### 4. Conclusion

The use of the BIM methodology together with the visual programming provides an essential tool for the use of the multiple data contained in the models. In this article we have proposed a framework for supporting a decision making process for designers and involved agents. It allows some basic acoustic parameters (reverberation time

and airborne acoustic insulation) to be calculated in a first approach. Also, the tool provides an automatic check to the requirements and quantification of the building elements.

The main advantages obtained by this proposal are: 1) reduced calculation time (reintroducing data is not necessary), 2) the results are visualized in the same design interface, 3) as the framework is integrated in the BIM software, errors due to the input of data from one software to another are avoided, 4) to evaluate a new solution, it is only necessary to change the construction element in the

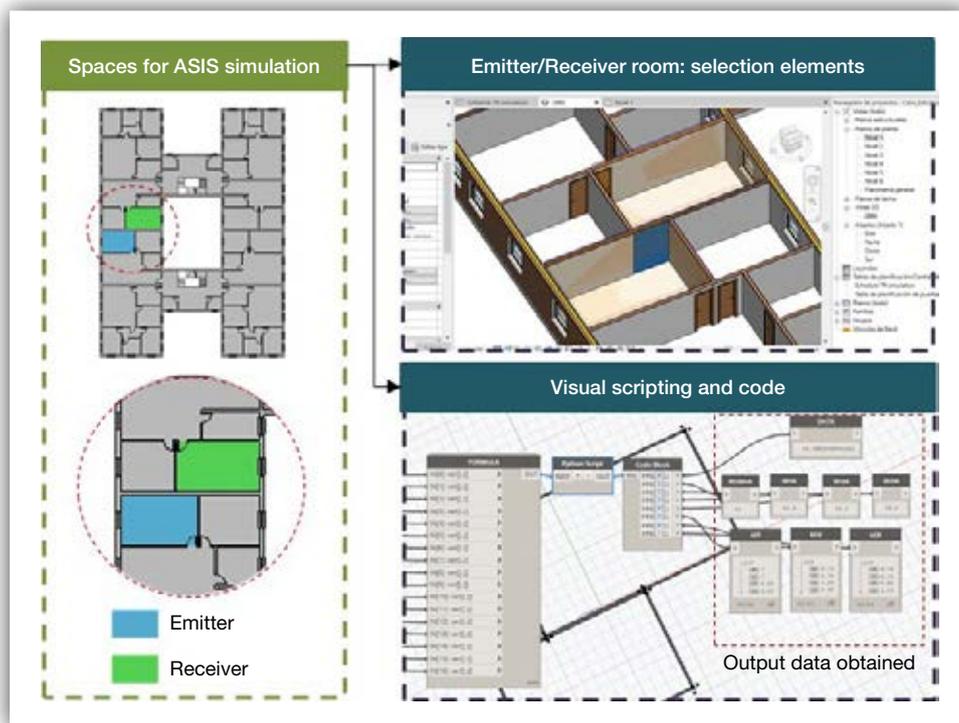


Figure 7. Process for element selection to perform ASIS simulation.

3D model, 5) the results obtained are similar to other software applications.

The authors think that this tool can contribute to get a better visualization of the analysis without exporting or regenerating the model in a different software. The system reduces the time required for the additional work and the possible errors that could result from this reprocess. The visualization of the results in the same design environment of the projects provides a more global vision, allowing an optimization in the decision making process.

With regard to the results obtained in the case of study, the BIM methodology has been shown applicability to the field of acoustics during the early stages of design. Similar results are obtained using other tested calculation software. Future lines of research will include the improvement of the BIM-based framework, adapting it to more complex geometries. Expansion of the calculation packages (impact noise and vertical transmissions and external noise), upgrading of the database of building materials and construction elements will be also be accomplished in future research work.

## 5. Acknowledgements

The work of Antonio Jesús Aguilar Aguilera and María Luisa de la Hoz Torres was supported by the Ministerio de Ciencia, Innovación y Universidades under an FPU grant.

## 6. References

- [1] I. Sarbu and C. Sebarchievici, "Aspects of indoor environmental quality assessment in buildings," *Energy and buildings*, vol. 60, pp. 410-419, 2013).
- [2] P. Pinho, M. Pinto, R. M. Almeida, S. Lopes, and L. Lemos, "Aspects concerning the acoustical performance of school buildings in Portugal," *Applied Acoustics*, vol. 106, pp. 129-134, 2016).
- [3] B. Berglund, T. Lindvall, D. H. Schwela, and W. H. Organization, "Guidelines for community noise," 1999).
- [4] J. Y. Jeon, J. K. Ryu, and P. J. Lee, "A quantification model of overall dissatisfaction with indoor noise environment in residential buildings," *Applied Acoustics*, vol. 71, no. 10, pp. 914-921, 2010).
- [5] J. K. Ryu and J. Y. Jeon, "Influence of noise sensitivity on annoyance of indoor and outdoor noises in residential buildings," *Applied Acoustics*, vol. 72, no. 6, pp. 336-340, 2011).
- [6] C. Wu and M. Clayton, "BIM-based acoustic simulation Framework'," in *30th CIB W78 International Conference*, 2013, pp. 99-108.
- [7] G. K. Oral, A. K. Yener, and N. T. Bayazit, "Building envelope design with the objective to ensure thermal, visual and acoustic comfort conditions," *Building and Environment*, vol. 39, no. 3, pp. 281-287, 2004).

- [8] D. Bryde, M. Broquetas, and J. M. Volm, "The project benefits of building information modelling (BIM)," *Int. j. proj. manag.*, vol. 31, no. 7, pp. 971-980, 2013.
- [9] C. M. Eastman, C. Eastman, P. Teicholz, and R. Sacks, *BIM handbook: A guide to building information modeling for owners, managers, designers, engineers and contractors*. John Wiley & Sons, 2011.
- [10] Y. Tan, Y. Fang, T. Zhou, Q. Wang, and J. Cheng, "Improve indoor acoustics performance by using building information modeling," in *ISARC. Proceedings of the International Symposium on Automation and Robotics in Construction*, 2017, vol. 34: Vilnius Gediminas Technical University, Department of Construction Economics.
- [11] "Código Técnico de la Edificación, Documento Básico HR Protección frente al ruido," Ministerio de Fomento, 2009).
- [12] ISO 12354-1:2017 Building acoustics - Estimation of acoustic performance of buildings from the performance of elements - Part 1: Airborne sound insulation between rooms, ed.
- [13] *Autodesk Revit (2019)*. <http://www.autodesk.es/products/revit-family/overview>, [Online; accessed 28-February-2019].
- [14] *Dynamo Version 2.0.2 (2019)*. <https://dynamobim.org> [Online; accessed 28-February-2019].

## Índice de anunciantes

	Pág.
<b>Datakustik</b>	<b>2</b>
<b>Brüel &amp; Kjaer</b>	<b>11-12</b>
<b>Cesva Instruments</b>	<b>22-23</b>
<b>Sto</b>	<b>34</b>
<b>Saint-Gobain Isover</b>	<b>40</b>
<b>Decustik</b>	<b>51</b>
<b>Acousticware</b>	<b>63</b>
<b>Audiotec</b>	<b>69</b>
<b>AAC Centro de Acústica Aplicada</b>	<b>107</b>



## Cadna A®

**CadnaA es el software líder en España para el cálculo, análisis y presentación de mapas de ruido en ambiente exterior**


### Novedades CadnaA 2019

- Implementación de modelos CNOSSOS-EU, incluyendo las últimas correcciones de acuerdo con la norma ISO/TR 17534-4.
- Importación directa de bases de datos MS Excel
- Cálculo en 1/3 octavas e inclusión de nuevos parámetros de cálculo, tales como el L<sub>10</sub>.
- Importación directa de archivos de directividad en formato CLF (\*.CF1 y \*.CF2) y visualización de la directividad en 3D.



## Cadna R®

**CadnaR es el software para el cálculo y gestión del sonido interior en salas y recintos industriales**

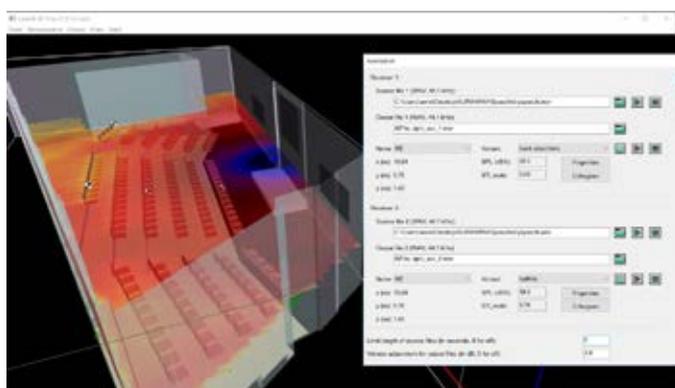

### Novedades CadnaR 2019

- Auralización: escuche su sala antes y después de la optimización acústica y demuestre sus beneficios a cualquier persona.
- Cálculo y evaluación de la Matriz-STI para determinar la inteligibilidad de todas las combinaciones entre orador y receptor en una sala.
- Filtro de importación desde SketchUp mejorado
- Importación de directividades en formato CLF

PLATAFORMA DE SOFTWARE FLEXIBLE

# EL SOFTWARE DE SONIDO Y VIBRACIONES QUE TRABAJA IGUAL QUE USTED



## BK CONNECT™ – UNA PLATAFORMA DE SOFTWARE FLEXIBLE DISEÑADA PENSANDO EN SUS NECESIDADES Y TAREAS

BK Connect es la nueva plataforma de análisis de sonido y vibraciones de Brüel & Kjær. Ofrece muchas funciones y prestaciones innovadoras pero, sobre todo, tiene un diseño adaptado a los flujos de trabajo, las tareas y las necesidades de los usuarios. **Para acceder a lo que cada uno necesita, cuando lo necesita.** Es una plataforma fácil de usar, que simplifica los procesos de ensayo y análisis. El usuario trabaja de forma más inteligente, con un alto grado de flexibilidad y un **riesgo de error muy reducido.**

### Ahora introducimos los Applets de BK Connect:

herramientas específicas para tareas específicas, a un precio imbatible.

Vea más en [bkconnect.bksv.com/es/applets/](http://bkconnect.bksv.com/es/applets/)



**Brüel & Kjær** 

BEYOND MEASURE

**Brüel & Kjær España S.L.**

C/ Teide 5 (Madrid) · 28703 San Sebastián de los Reyes

Teléfono: +34 91 659 08 20 · Fax: +34 91 659 08 24

[bruelkjaer@bksv.com](mailto:bruelkjaer@bksv.com)

[www.bksv.com/bkconnect-es](http://www.bksv.com/bkconnect-es)